

Freestanding STOVE AB S/DR white tile

KOZA/AB/S/DR/KAFEL/BIALY

EAN:

5901350017500

Stove AB with cylindrical, modern design is a great solution for people who long for warmth, but do not have a large space in their interior.

Shipping on pallet

Implementation within



Technical Specifications

Rated output (kW)	8,0
Range of heating power (kW)	5.5 - 10.5
Efficiency (%)	78,0
Exhaust outlet diameter (mm)	150
Complies with Ecodesign criteria	Yes
Designed for heat recovery unit	Yes
Fuel type	recommended seasoned hardwood with moisture $\leq 20\%$
Weight (kg)	106,0
CO emission (at 13% O ₂) \leq given in %	0,08
Flue gas temperature (°C)	265,0
Max log length (cm)	25
Emission of dust (mg/Nm ³)	39,0
Compliance with BlmSchV 2 standard	Yes
The energy efficiency index EEI	102,79

Glazing type	quadrant
Opening of the doors	to the left
Material	steel, tile
Width (cm)	52,80
Height (cm)	105,20
Depth (cm)	42,20
External air inlet	Yes
The liner of the combustion chamber	Yes
Ashpan	Yes
Decorative printed glass	No
ASDP - automatic control of the air supply	No
Turbine TURBOFAN	No
Water panel	No

Features

MAXIMUM USE OF ENERGY

The body and the front of the insert are resistant to high temperatures thanks to the high quality steel used in production.

Full combustion on the dust thanks to two deflectors extending the exhaust path.

Triple system of combustion chamber's air venting: primary air - secondary air supplied under the grate through holes in a back wall. Additionally clean glass system designed (air curtain).

Efficient burning process & maintaining of temperature to keep the warmth for longer thanks to lining of combustion chamber with TERMOTEC - heat accumulating material which raises the temperature in the combustion chamber.

Built-in fi 100 external air intake which provides air supply from the outside directly into the hearth which results in better combustion and better comfort of usage.

ECOLOGICAL COMBUSTION

The stove meets the criteria of **Ecodesign** and the restrictive **BImSchV 2** norm setting the maximum CO emission.

SAFETY AT THE HIGHEST LEVEL

Perfect tightness thanks to the solid welds made in a noble gas shielding.

All steel elements are laser cut and bent on CNC bending machines.

Front is equipped with a heat-resistant ceramics that can withstand temperatures up to 660°C.

CONVENIENT TO USE

Movable grate and ash drawer enable to keep the stove clean.

Reduced soot deposition through a system of pure glass (air curtain).

Elegant and comfortable sliding handle.

It can be used in a various mounting conditions thanks to adjustable exhaust outlet: on the back or top of the stove (for back exhaust outlet installation purchase of top plate cover is required).

MODERN DESIGN


Design referring to retro style - large grooved tiles.

The chamber below the furnaces is equipped with a mechanism push to open - press to open.

Improved vision of the fire thanks to the curved glass

5 year warranty.

Technical drawing

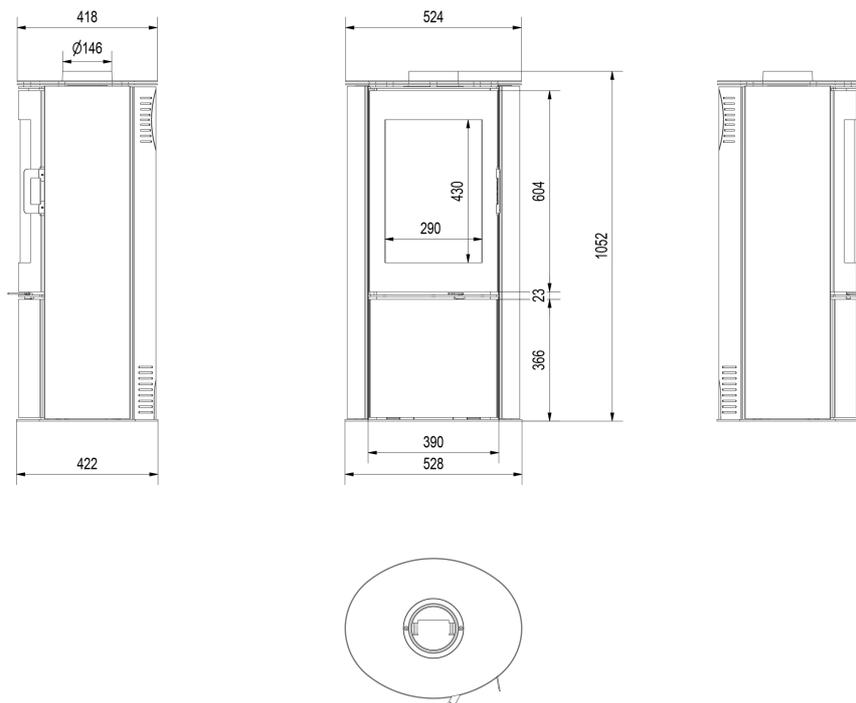


Additional options



Top plate cover for STOVE AB S,
THOR, FALCON, ANTARES

Top plate cover for STOVE AB S, STOVE AB S/2, THOR, THOR/VIEW, FALCON, FALCON/VIEW, ANTARES is required for back exhaust outlet installation.



Spring for door shutting MB, LUCY L/BS, NADIA L/BS, AQUARIO, STOVE AB S, STOVE AB S/2, ORBIT, FALCON, ANTARES

Spring for door shutting - automatically closes the door.



Steel pipe 150/1m

Exhaust pipe designed for connecting wood-fired fireplace inserts an the existing flue pipes.



Steel pipe 150/0.5m

Exhaust pipe designed for connecting wood-fired fireplace inserts an the existing flue pipes.



Movable elbow 150/90

Adjustable elbow up to 90°, 3-segment, diameter: 150 mm.



Damper Ø 150 black

The damper is designed to regulate the smoke draft.



Steel rosette Ø 150

Rosette Ø 150, made of black sheet - a masking element.

Warranty

All the products available at www.kratki.com are brand new, free from any physical or legal defects. The Producer grants a 5-year warranty from the moment of purchase of a stove for its reliable operation. The ceramic liner is covered with a 2-year warranty from the moment of the purchase of

the stove. Grate and sealing for the stove are covered with a 1-year warranty from the moment of the purchase of the stove. The warranty shall not cover heat-resistant ceramics. The application of the stove, the method of joining with the chimney as well as the terms and conditions of use must correspond with the manual.

Return

A Customer being a Consumer, who has concluded the Sales Contract may rescind thereof within a period of 14 days without giving any reasons. The time limits run for the rescission of the Sales Contract shall commence at the time of acquiring the Goods by the Customer or a third party of their choice, other, however, than a carrier. The representations may be submitted in a form whose template has been published by the Seller at the Online Shop Website.



Kratki.pl Marek Bal
ul. W. Gombrowicza 4
26-660 Wsola/Jedlińsk

www.kratki.com
+48 48 338 44 88

Date of publication:
03.04.2020