

Fireplace ZIBI 12 right BS

ZIBI/P/BS

EAN:

5901350062111

Steel insert with a modern and panoramic front, which make it seems wider than it is.

Shipping on pallet

Implementation within



Technical Specifications

| | |
|--|---|
| Rated output (kW) | 11,0 |
| Range of heating power (kW) | 4.5 - 14.0 |
| Efficiency (%) | 80,0 |
| Exhaust outlet diameter (mm) | 180 |
| Complies with Ecodesign criteria | Yes |
| Designed for heat recovery unit | Yes |
| Fuel type | recommended seasoned hardwood with moisture $\leq 20\%$ |
| Weight (kg) | 157,0 |
| CO emission (at 13% O ₂) \leq given in % | 0,10 |
| Flue gas temperature (°C) | 290,0 |
| Max log length (cm) | 40 |
| Emission of dust (mg/Nm ³) | 38,0 |
| Compliance with BlmSchV 2 standard | Yes |
| The energy efficiency index EEI | 105,40 |
| The minimum active field of exhaust grilles (cm ²) | ≥ 900 |
| The minimum active field of inlet grilles (cm ²) | ≥ 700 |
| Glazing type | lateral |
| Opening of the doors | to the right |

| | |
|-------------------------------------|-------|
| Material | steel |
| Width (cm) | 76,80 |
| Height (cm) | 87,50 |
| Depth (cm) | 44,00 |
| External air inlet | Yes |
| The liner of the combustion chamber | Yes |
| Ashpan | No |
| Decorative printed glass | No |

Features

MAXIMUM USE OF ENERGY

The body and the front of the insert are resistant to high temperatures thanks to the high quality steel used in production.

Efficient burning process & maintaining of temperature to keep the warmth for longer thanks to lining of combustion chamber with TERMOTEC - heat accumulating material which raises the temperature in the combustion chamber.

Combustion of fuel particles thanks to deflector, which extends the exhaust gas path.

Built-in fi 125 external air intake which provides air supply from the outside directly into the hearth which results in better combustion and better comfort of usage.

Regulation of air intake is made by the sliding element which is located at the bottom. This allows for manual dosing of air required for proper combustion.

Reducing emissions of harmful CO to the atmosphere by regulating of secondary air supply.

Maximum usage of heat thanks to densely spaced radiators.

SAFETY AT THE HIGHEST LEVEL

Perfect tightness thanks to the solid welds made in a noble gas shielding.

All steel elements are laser cut and bent on CNC bending machines.

Insert's front equipped with a heat resistant ceramics that withstands temperatures up to 660°C.

ECOLOGICAL COMBUSTION

The unit meets the requirements of **Ecodesign** standards and the restrictions of the **BImSchV 2** standard, which determines the maximum CO emission.

CONVENIENT TO USE

An elegant and comfortable handle.


It can be used in a various mounting conditions thanks to adjustable legs and movable fumes outlet with 360 regulation.

MODERN DESIGN


A fireplace insert with two panes compiled with each other at angles (without brackets).

5 year warranty.

Technical drawing

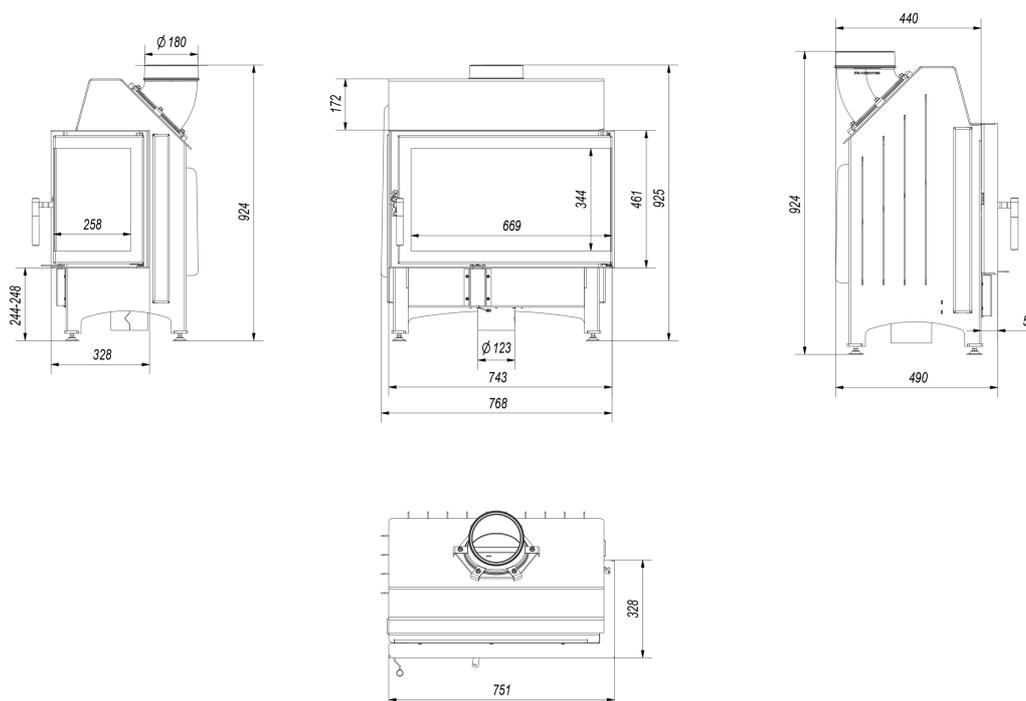

Additional options



Spring for door shutting MB P/BS,
LUCY P/BS, NADIA P/BS, THOR

Spring for door shutting - automatically closes the door.



Steel pipe 180/1m

Exhaust pipe designed for connecting wood-fired fireplace inserts an the existing flue pipes.



Steel pipe 180/0.5m

Exhaust pipe designed for connecting wood-fired fireplace inserts an the existing flue pipes.



Movable elbow 180/90

Adjustable elbow up to 90°, 3-segment, diameter: 180 mm.



The passage from the pipe system

Ø 180

The passage from the pipe system to the ceramic chimney Ø180.



The passage from the reduction

from the pipe system Ø 180/200

The passage from the pipe system to the ceramic chimney Ø 180/200.



Podstawa pod wkład ZIBI

Nogi pod wkład ZIBI umożliwiają stabilne i bezproblemowe ustawienie wkładu kominkowego, możliwość regulacji wysokości.

Warranty

All the products available at www.kratki.com are brand new, free from any physical or legal defects. The Producer grants a 5-year warranty from the moment of purchase of an insert for its reliable operation. The ceramic liner of the combustion chamber is covered with a 2-year warranty from the moment of the purchase of the insert. Grate and sealing for the fireplace are covered with a 1-year warranty from the moment of the purchase of the insert. The warranty shall not cover heat-resistant ceramics. The application of the fireplace insert, the method of joining with the chimney as well as the terms and conditions of use must correspond with the manual.

Return

A Customer being a Consumer, who has concluded the Sales Contract may rescind thereof within a period of 14 days without giving any reasons. The time limits run for the rescission of the Sales

Contract shall commence at the time of acquiring the Goods by the Customer or a third party of their choice, other, however, than a carrier. The representations may be submitted in a form whose template has been published by the Seller at the Online Shop Website.



Kratki.pl Marek Bal

ul. W. Gombrowicza 4
26-660 Wsola/Jedlińsk

www.kratki.com

+48 48 338 44 88

Date of publication:

27.03.2020