

Fireplace LUCY 14 tunnel

LUCY/14/T

EAN:

5903950029754

The insert with modern panoramic shape and extraordinary view of fire thanks to the glass installed in front and at the back. Advanced solutions ensure energy saving and make using and cleaning of the fireplace very easy.



Shipping on pallet

Implementation within

Technical Specifications

Rated output (kW)	14,0
Range of heating power (kW)	6.0 - 17.0
Efficiency (%)	81,0
Exhaust outlet diameter (mm)	200
Complies with Ecodesign criteria	Yes
Designed for heat recovery unit	Yes
Fuel type	recommended seasoned hardwood with moisture $\leq 20\%$
Weight (kg)	189,0
CO emission (at 13% O ₂) \leq given in %	0,10
Flue gas temperature (°C)	265,0
Max log length (cm)	40
Emission of dust (mg/Nm ³)	18,0
Compliance with BlmSchV 2 standard	Yes
The energy efficiency index EEI	106,71

The minimum active field of exhaust grilles (cm ²)	≥900
The minimum active field of inlet grilles (cm ²)	≥700
Glazing type	tunnel type
Opening of the doors	to the left
Material	steel
Width (cm)	80,40
Height (cm)	128,00
Depth (cm)	42,00
External air inlet	Yes
The liner of the combustion chamber	Yes
Ashpan	Yes
Decorative printed glass	Yes

Features

MAXIMUM USE OF ENERGY

More efficient combustion and longer maintenance of temperature by lining the combustion chamber with ceramic material TERMOTEC which accumulates heat and raises the temperature in the furnace.

Full combustion on the dust thanks to two deflectors which extend the exhaust path. This process increases the efficiency of burning and guarantees better energy use. It also minimizes the emission of harmful substances to the atmosphere.

Air supply to the inserts comes only from outside thanks to the inbuilt air intake connector fi 125 mm. It is controlled by an adjustable throttle with one controller beneath the door. This solution excludes errors of improper use. The whole mechanism works very quietly and flawlessly.

In this insert there is double air system of combustion chamber. Primary air which enables setting a fire is supplied under the grate.

Additionally, this insert is equipped with Clea Galss System (air curtain), so the air is supplied directly to the glass through a system of channels located on the sides of the fireplace. In this way oxygen is supplied to the upper part of the combustion chamber, where happens post-combustion of gases produced while combustion of wood. At the same time it reduces harmful CO emissions to the atmosphere.

Such air system enables to control burning process very precisely.

SAFETY ON THE HIGHEST LEVEL

Front of the insert is equipped with a heat resistant ceramic withstanding temperatures up to 660°C. We offered by us glass certified quality and safety.

The special perforated design of the handle protects against excessive heating, which has the influence on the high comfort of using the fireplace.

The body and the front of the insert is resistant to high temperatures through the use of high quality

steel.

Excellent tightness thanks to the solid welding made in shielded noble gas. Steel elements are laser cut with the help of modern equipment, and then they are bent on CNC benders.

ECOLOGICAL COMBUSTION

The unit meets the requirements of **Ecodesign** standards and the restrictions of the **BImSchV 2** standard, which determines the maximum CO emission.

COMFORTABLE USE

Special profiled bottom plate of TERMOTEC is used in this insert. Thank to that the chamber of the fireplace is bigger and larger amount of wood can be put inside.

Movable grate and ash drawer enable to keep the insert clean.

Reduced soot deposition through a system of clean glass system (air curtain). Air curtain separates the glass from the chamber thanks of that the glass doesn't become dirty and emit more heat to the room.

Insert can be easily elevate thanks to the regulated the legs.

The model is equipped with a movable exhaust outlet and thanks to that there is no need to purchase additional knees for installation. It is possible due to easy adjustment of the angle of connection to the chimney system.

MODERN DESIGN


The insert has two doors – front and back ones (instead of the back wall), thanks to this solution the heat can be emitted in both directions.

This type of insert is usually chosen to install between two adjacent rooms for example living room and dining room or bedroom.

The insert has singular decorative glass thanks to that it looks elegant and modern. Such solution visually enlarges the front of the insert and emphasizes the view of the fire.

The door of the insert has comfortable handle.

Technical drawing

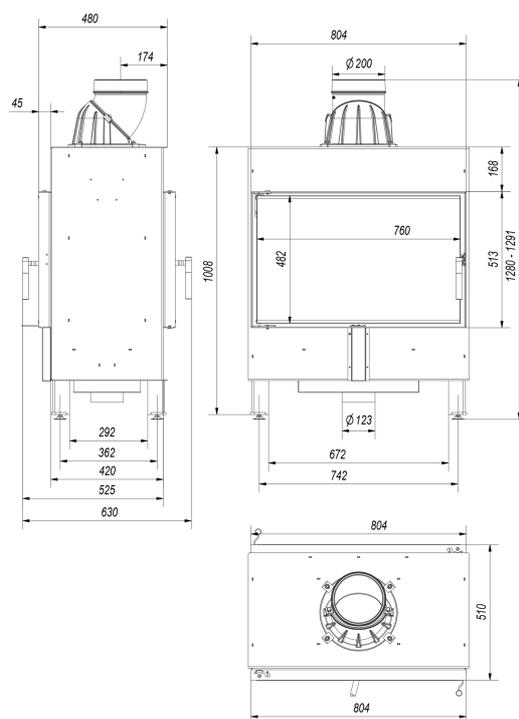


Additional options



Spring for door shutting NADIA,
LUCY

Spring for door shutting - automatically closes the door.



Steel frame 45° for LUCY/14,
LUCY/14/SLIM, LUCY/14/T,
LUCY/PW/16/W

Modern steel decorative frame for the fireplace insert: LUCY/14, LUCY/14/SLIM, LUCY/14/T and LUCY/PW/16/W.



Podstawa pod wkład MB, NB, VN i
LUCY

Nogi pod wkłady MB, NB, VN i LUCY umożliwiają stabilne i bezproblemowe ustawienie wkładu kominkowego, możliwość regulacji wysokości.



Steel pipe 200/1m

Exhaust pipe designed for connecting wood-fired fireplace inserts an the existing flue pipes.



Steel pipe 200/0.5m

Exhaust pipe designed for connecting wood-fired fireplace inserts an the existing flue pipes.



Movable elbow 200/90

Adjustable elbow up to 90°, 3-segment, diameter: 200 mm.



The passage from the pipe system Ø 200

The passage from the pipe system to the ceramic chimney Ø200.



Black TERMOTEC lining - additional option

TERMOTEC is heat accumulating material which raises the temperature in the combustion chamber. Black color was obtained by the pigmentation of mass with the usage of natural dyes.

Warranty

All the products available at www.kratki.com are brand new, free from any physical or legal defects. The Producer grants a 5-year warranty from the moment of purchase of an insert for its reliable operation. The ceramic liner of the combustion chamber is covered with a 2-year warranty from the moment of the purchase of the insert. Grate and sealing for the fireplace are covered with a 1-year warranty from the moment of the purchase of the insert. The warranty shall not cover heat-resistant ceramics. The application of the fireplace insert, the method of joining with the chimney as well as the terms and conditions of use must correspond with the manual.

Return

A Customer being a Consumer, who has concluded the Sales Contract may rescind thereof within a period of 14 days without giving any reasons. The time limits run for the rescission of the Sales Contract shall commence at the time of acquiring the Goods by the Customer or a third party of their choice, other, however, than a carrier. The representations may be submitted in a form whose template has been published by the Seller at the Online Shop Website.



Kratki.pl Marek Bal
ul. W. Gombrowicza 4
26-660 Wsola/Jedlińsk

www.kratki.com
+48 48 338 44 88

Date of publication:
27.03.2020